


CFT..MA



CFT..VMA

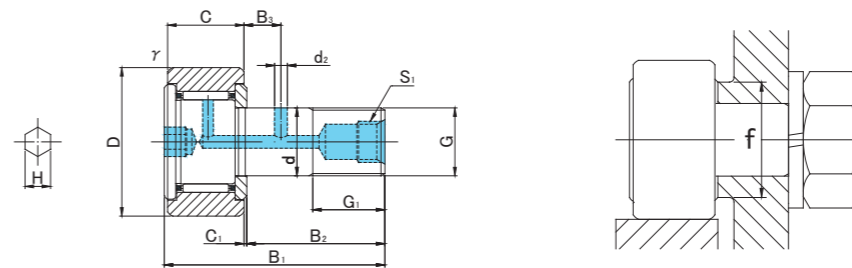

CFT..MA 类型

预包装润滑脂

螺柱直径 (mm)	类型代号				尺寸 (mm)													基本额定 动负荷	基本额定 静负荷	最大 允许载荷	允许转速 *	轨道载荷能力		最大 拧紧力矩	质量							
	圆筒外圈		球面外圈 R500(CF12 ~ CF18) R1000(CF20 ≤)		D	C	d	G	G1	B1	B2	B3	C1	S1	d2	H	rs 最小					f 最小	Cr N			Cor N	N	rpm	圆筒外圈 N	球面外圈 N	N·m	g (大约)
	无密封圈	带密封圈	无密封圈	带密封圈																												
12	0	CFT12MA	CFT12MUUA	CFT12MRA	CFT12MUURA	30	14	12	M12×1.5	13	40	25	6	0.6	M6×0.75	3	6	0.6	20	7 300	9 010	7 840	14 000	7 060	2 450	22	95					
	-0.018	CFT12VMA	CFT12VMUUA	CFT12VMRA	CFT12VMUURA																											
12	0	CFT12-1MA	CFT12-1MUUA	CFT12-1MRA	CFT12-1MUURA	32	14	12	M12×1.5	13	40	25	6	0.6	M6×0.75	3	6	0.6	20	7 300	9 010	7 840	14 000	7 450	2 740	22	105					
	-0.018	CFT12-1VMA	CFT12-1VMUUA	CFT12-1VMRA	CFT12-1VMUURA																											
16	0	CFT16MA	CFT16MUUA	CFT16MRA	CFT16MUURA	35	18	16	M16×1.5	17	52	32.5	8	0.8	Rc1/8	3	6	0.6	24	11 080	16 860	14 660	10 000	11 200	3 140	58	170					
	-0.018	CFT16VMA	CFT16VMUUA	CFT16VMRA	CFT16VMUURA																											
18	0	CFT18MA	CFT18MUUA	CFT18MRA	CFT18MUURA	40	20	18	M18×1.5	19	58	36.5	8	0.8	Rc1/8	3	6	1	26	13 520	23 180	20 160	8 500	14 400	3 720	87	250					
	-0.018	CFT18VMA	CFT18VMUUA	CFT18VMRA	CFT18VMUURA																											
20	0	CFT20MA	CFT20MUUA	CFT20MRA	CFT20MUURA	52	24	20	M20×1.5	21	66	40.5	9	0.8	Rc1/8	4	8	1	36	19 020	31 830	25 710	7 000	23 200	8 230	120	460					
	-0.021	CFT20VMA	CFT20VMUUA	CFT20VMRA	CFT20VMUURA																											
20	0	CFT20-1MA	CFT20-1MUUA	CFT20-1MRA	CFT20-1MUURA	47	24	20	M20×1.5	21	66	40.5	9	0.8	Rc1/8	4	8	1	36	19 020	31 830	25 710	7 000	21 000	7 150	120	385					
	-0.021	CFT20-1VMA	CFT20-1VMUUA	CFT20-1VMRA	CFT20-1VMUURA																											
24	0	CFT24MA	CFT24MUUA	CFT24MRA	CFT24MUURA	62	29	24	M24×1.5	25	80	49.5	11	0.8	Rc1/8	4	8	1	40	28 040	48 410	39 600	6 500	34 200	10 500	220	815					
	-0.021	CFT24VMA	CFT24VMUUA	CFT24VMRA	CFT24VMUURA																											
24	0	CFT24-1MA	CFT24-1MUUA	CFT24-1MRA	CFT24-1MUURA	72	29	24	M24×1.5	25	80	49.5	11	0.8	Rc1/8	4	8	1	40	28 040	48 410	39 600	6 500	39 800	12 900	220	1 140					
	-0.021	CFT24-1VMA	CFT24-1VMUUA	CFT24-1VMRA	CFT24-1VMUURA																											
30	0	CFT30MA	CFT30MUUA	CFT30MRA	CFT30MUURA	80	35	30	M30×1.5	32	100	63	15	1	Rc1/8	4	8	1	46	41 740	78 250	58 960	5 000	52 600	14 900	450	1 870					
	-0.021	CFT30VMA	CFT30VMUUA	CFT30VMRA	CFT30VMUURA																											
30	0	CFT30-1MA	CFT30-1MUUA	CFT30-1MRA	CFT30-1MUURA	85	35	30	M30×1.5	32	100	63	15	1	Rc1/8	4	8	1	46	41 740	78 250	58 960	5 000	56 000	16 100	450	2 030					
	-0.021	CFT30-1VMA	CFT30-1VMUUA	CFT30-1VMRA	CFT30-1VMUURA																											
30	0	CFT30-2MA	CFT30-2MUUA	CFT30-2MRA	CFT30-2MUURA	90	35	30	M30×1.5	32	100	63	15	1	Rc1/8	4	8	1	46	41 740	78 250	58 960	5 000	59 300	17 300	450	2 220					
	-0.021	CFT30-2VMA	CFT30-2VMUUA	CFT30-2VMRA	CFT30-2VMUURA																											

\* 无密封圈，适合润滑脂润滑。如果是油润滑，最大允许值可到该数值的 130%。  
若为密封型，数值为该数值的 70%。

外圈公差 (μm)

类型	圆筒外圈	球面外圈
CF12M	0/-9	0/-50
CF12-1M,CF16M,CF18M,CF20-1M	0/-11	0/-50
CF20M,CF24M,CF24-1M,CF30M	0/-13	0/-50
CF30-1M,CF30-2M	0/-15	0/-50

附件

类型	附件
所有类型	不锈钢螺母 已预装