




NAST..M

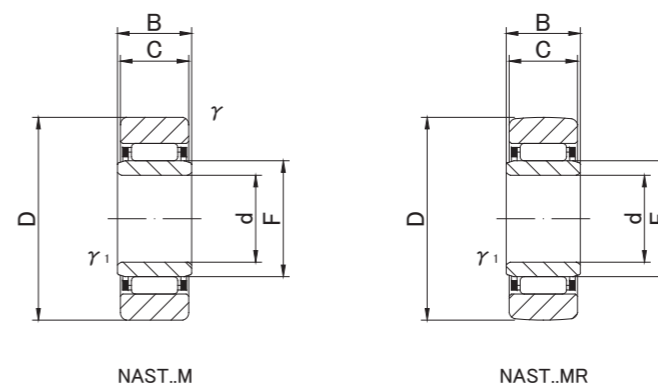

NAST..M 类型

预包装润滑脂

轴直径 (mm)	类型代号		尺寸 (mm)								基本额定 动负荷	基本额定 静负荷	轨道载荷能力		允许转速 *	质量				
	圆筒外圈	球面外圈 (R500)											Cr N	Cor N			圆筒外圈 N	球面外圈 N	rpm	g (大约)
			d	D	B	C	r _s 最小	r _{1s} 最小	F											
6	NAST 6M	NAST 6MR	6 ⁰ _{-0.008}	19	10	9.8	0.3		0.3	10	3 790	4 180	3 530	1 370	20 000	17.8				
8	NAST 8M	NAST 8MR	8 ⁰ _{-0.008}	24	10	9.8	0.6		0.3	12	5 220	5 410	4 020	1 860	17 000	28				
10	NAST10M	NAST10MR	10 ⁰ _{-0.008}	30	12	11.8	1		0.3	14	8 920	8 890	5 590	2 450	15 000	50				
12	NAST12M	NAST12MR	12 ⁰ _{-0.008}	32	12	11.8	1		0.3	16	9 560	10 020	5 980	2 740	13 000	58				
15	NAST15M	NAST15MR	15 ⁰ _{-0.008}	35	12	11.8	1		0.3	20	11 310	13 150	6 570	3 140	10 000	62				
17	NAST17M	NAST17MR	17 ⁰ _{-0.008}	40	16	15.8	1		0.3	22	16 000	19 220	10 900	3 720	9 500	110				
20	NAST20M	NAST20MR	20 ⁰ _{-0.010}	47	16	15.8	1		0.3	25	17 660	22 540	12 700	4 610	8 500	155				
25	NAST25M	NAST25MR	25 ⁰ _{-0.010}	52	16	15.8	1		0.3	30	19 040	26 120	14 100	5 290	7 000	180				
30	NAST30M	NAST30MR	30 ⁰ _{-0.010}	62	20	19.8	1		0.6	38	27 870	41 760	22 100	6 660	5 500	320				
35	NAST35M	NAST35MR	35 ⁰ _{-0.012}	72	20	19.8	1		0.6	42	29 620	46 550	25 700	8 130	5 000	440				
40	NAST40M	NAST40MR	40 ⁰ _{-0.012}	80	20	19.8	1.5		1	50	32 840	56 210	26 900	9 310	4 000	530				
45	NAST45M	NAST45MR	45 ⁰ _{-0.012}	85	20	19.8	1.5		1	55	34 130	61 080	28 500	10 100	4 000	580				
50	NAST50M	NAST50MR	50 ⁰ _{-0.012}	90	20	19.8	1.5		1	60	35 600	66 050	30 200	11 000	3 500	635				

* 适合润滑脂润滑。如果是油润滑，最大容许值可到该数值的 130%。

外圈公差 (外径) (μm)

类型	圆筒外圈	球面外圈
NAST6M, NAST8M, NAST10M	0/-9	0/-50
NAST12M, NAST15M, NAST17M, NAST20M	0/-11	0/-50
NAST25M, NAST30M, NAST35M, NAST40M	0/-13	0/-50
NAST45M, NAST50M	0/-15	0/-50