


**滚子从动件  
不锈钢**  
分离型  
带内圈  
带侧板

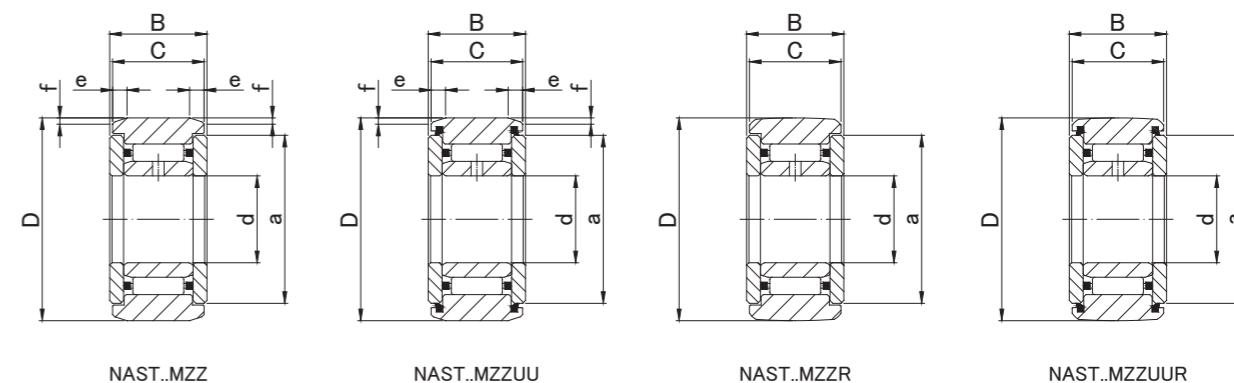

**NAST..MZZ 类型**

预包装润滑脂

| 轴直径<br>(mm) | 类型代号             |                    |                   |                     | 尺寸 (mm)                           |           |    |      |      |     |     | 基本额定动负荷<br> | 基本额定静负荷<br> | 轨道载荷能力<br> |           | 允许转速<br>* | 质量   |
|-------------|------------------|--------------------|-------------------|---------------------|-----------------------------------|-----------|----|------|------|-----|-----|-------------|-------------|------------|-----------|-----------|------|
|             | 圆筒外圈             |                    | 球面外圈<br>(R500)    |                     |                                   |           |    |      |      |     |     |             |             | 圆筒外圈<br>N  | 球面外圈<br>N |           |      |
|             | 无密封圈             | 带密封圈               | 无密封圈              | 带密封圈                |                                   |           |    |      |      |     |     |             |             |            |           |           |      |
| <b>6</b>    | <b>NAST 6MZZ</b> | <b>NAST 6MZZUU</b> | <b>NAST 6MZZR</b> | <b>NAST 6MZZUUR</b> | 6 <sup>0</sup> <sub>-0.008</sub>  | <b>19</b> | 14 | 13.8 | 14   | 2.5 | 0.8 | 3 790       | 4 180       | 3 530      | 1 370     | 20 000    | 24.5 |
| <b>8</b>    | <b>NAST 8MZZ</b> | <b>NAST 8MZZUU</b> | <b>NAST 8MZZR</b> | <b>NAST 8MZZUUR</b> | 8 <sup>0</sup> <sub>-0.008</sub>  | <b>24</b> | 14 | 13.8 | 17.5 | 2.5 | 0.8 | 5 220       | 5 410       | 4 510      | 1 860     | 17 000    | 39   |
| <b>10</b>   | <b>NAST10MZZ</b> | <b>NAST10MZZUU</b> | <b>NAST10MZZR</b> | <b>NAST10MZZUUR</b> | 10 <sup>0</sup> <sub>-0.008</sub> | <b>30</b> | 16 | 15.8 | 23.5 | 2.5 | 0.8 | 8 920       | 8 890       | 6 860      | 2 450     | 15 000    | 65   |
| <b>12</b>   | <b>NAST12MZZ</b> | <b>NAST12MZZUU</b> | <b>NAST12MZZR</b> | <b>NAST12MZZUUR</b> | 12 <sup>0</sup> <sub>-0.008</sub> | <b>32</b> | 16 | 15.8 | 25.5 | 2.5 | 0.8 | 9 560       | 10 020      | 7 350      | 2 740     | 13 000    | 75   |
| <b>15</b>   | <b>NAST15MZZ</b> | <b>NAST15MZZUU</b> | <b>NAST15MZZR</b> | <b>NAST15MZZUUR</b> | 15 <sup>0</sup> <sub>-0.008</sub> | <b>35</b> | 16 | 15.8 | 29   | 2.5 | 0.8 | 11 310      | 13 150      | 8 040      | 3 140     | 10 000    | 83   |
| <b>17</b>   | <b>NAST17MZZ</b> | <b>NAST17MZZUU</b> | <b>NAST17MZZR</b> | <b>NAST17MZZUUR</b> | 17 <sup>0</sup> <sub>-0.008</sub> | <b>40</b> | 20 | 19.8 | 32.5 | 3   | 1   | 16 000      | 19 220      | 11 800     | 3 720     | 9 500     | 135  |
| <b>20</b>   | <b>NAST20MZZ</b> | <b>NAST20MZZUU</b> | <b>NAST20MZZR</b> | <b>NAST20MZZUUR</b> | 20 <sup>0</sup> <sub>-0.010</sub> | <b>47</b> | 20 | 19.8 | 38   | 3   | 1   | 17 660      | 22 540      | 13 800     | 4 610     | 8 500     | 195  |
| <b>25</b>   | <b>NAST25MZZ</b> | <b>NAST25MZZUU</b> | <b>NAST25MZZR</b> | <b>NAST25MZZUUR</b> | 25 <sup>0</sup> <sub>-0.010</sub> | <b>52</b> | 20 | 19.8 | 43   | 3   | 1   | 19 040      | 26 120      | 15 300     | 5 290     | 7 000     | 225  |
| <b>30</b>   | <b>NAST30MZZ</b> | <b>NAST30MZZUU</b> | <b>NAST30MZZR</b> | <b>NAST30MZZUUR</b> | 30 <sup>0</sup> <sub>-0.010</sub> | <b>62</b> | 25 | 24.8 | 50.5 | 4   | 1.2 | 27 870      | 41 760      | 22 100     | 6 660     | 5 500     | 400  |
| <b>35</b>   | <b>NAST35MZZ</b> | <b>NAST35MZZUU</b> | <b>NAST35MZZR</b> | <b>NAST35MZZUUR</b> | 35 <sup>0</sup> <sub>-0.012</sub> | <b>72</b> | 25 | 24.8 | 53.5 | 4   | 1.2 | 29 620      | 46 550      | 25 700     | 8 130     | 5 000     | 550  |
| <b>40</b>   | <b>NAST40MZZ</b> | <b>NAST40MZZUU</b> | <b>NAST40MZZR</b> | <b>NAST40MZZUUR</b> | 40 <sup>0</sup> <sub>-0.012</sub> | <b>80</b> | 26 | 25.8 | 61.5 | 4   | 1.2 | 32 840      | 56 210      | 30 300     | 9 310     | 4 000     | 710  |
| <b>45</b>   | <b>NAST45MZZ</b> | <b>NAST45MZZUU</b> | <b>NAST45MZZR</b> | <b>NAST45MZZUUR</b> | 45 <sup>0</sup> <sub>-0.012</sub> | <b>85</b> | 26 | 25.8 | 66.5 | 4   | 1.2 | 34 130      | 61 080      | 31 100     | 10 100    | 4 000     | 760  |
| <b>50</b>   | <b>NAST50MZZ</b> | <b>NAST50MZZUU</b> | <b>NAST50MZZR</b> | <b>NAST50MZZUUR</b> | 50 <sup>0</sup> <sub>-0.012</sub> | <b>90</b> | 26 | 25.8 | 76   | 4   | 1.2 | 35 600      | 66 050      | 34 000     | 11 000    | 3 500     | 830  |

\* 无密封圈，适合润滑脂润滑。如果是油润滑，最大允许值可到该数值的 130%。  
若为密封型，数值为该数值的 70%。

外圈公差 (外径) (μm)

| 类型                                 | 圆筒外圈  | 球面外圈  |
|------------------------------------|-------|-------|
| NAST6M, NAST8M, NAST10M            | 0/-9  | 0/-50 |
| NAST12M, NAST15M, NAST17M, NAST20M | 0/-11 | 0/-50 |
| NAST25M, NAST30M, NAST35M, NAST40M | 0/-13 | 0/-50 |
| NAST45M, NAST50M                   | 0/-15 | 0/-50 |